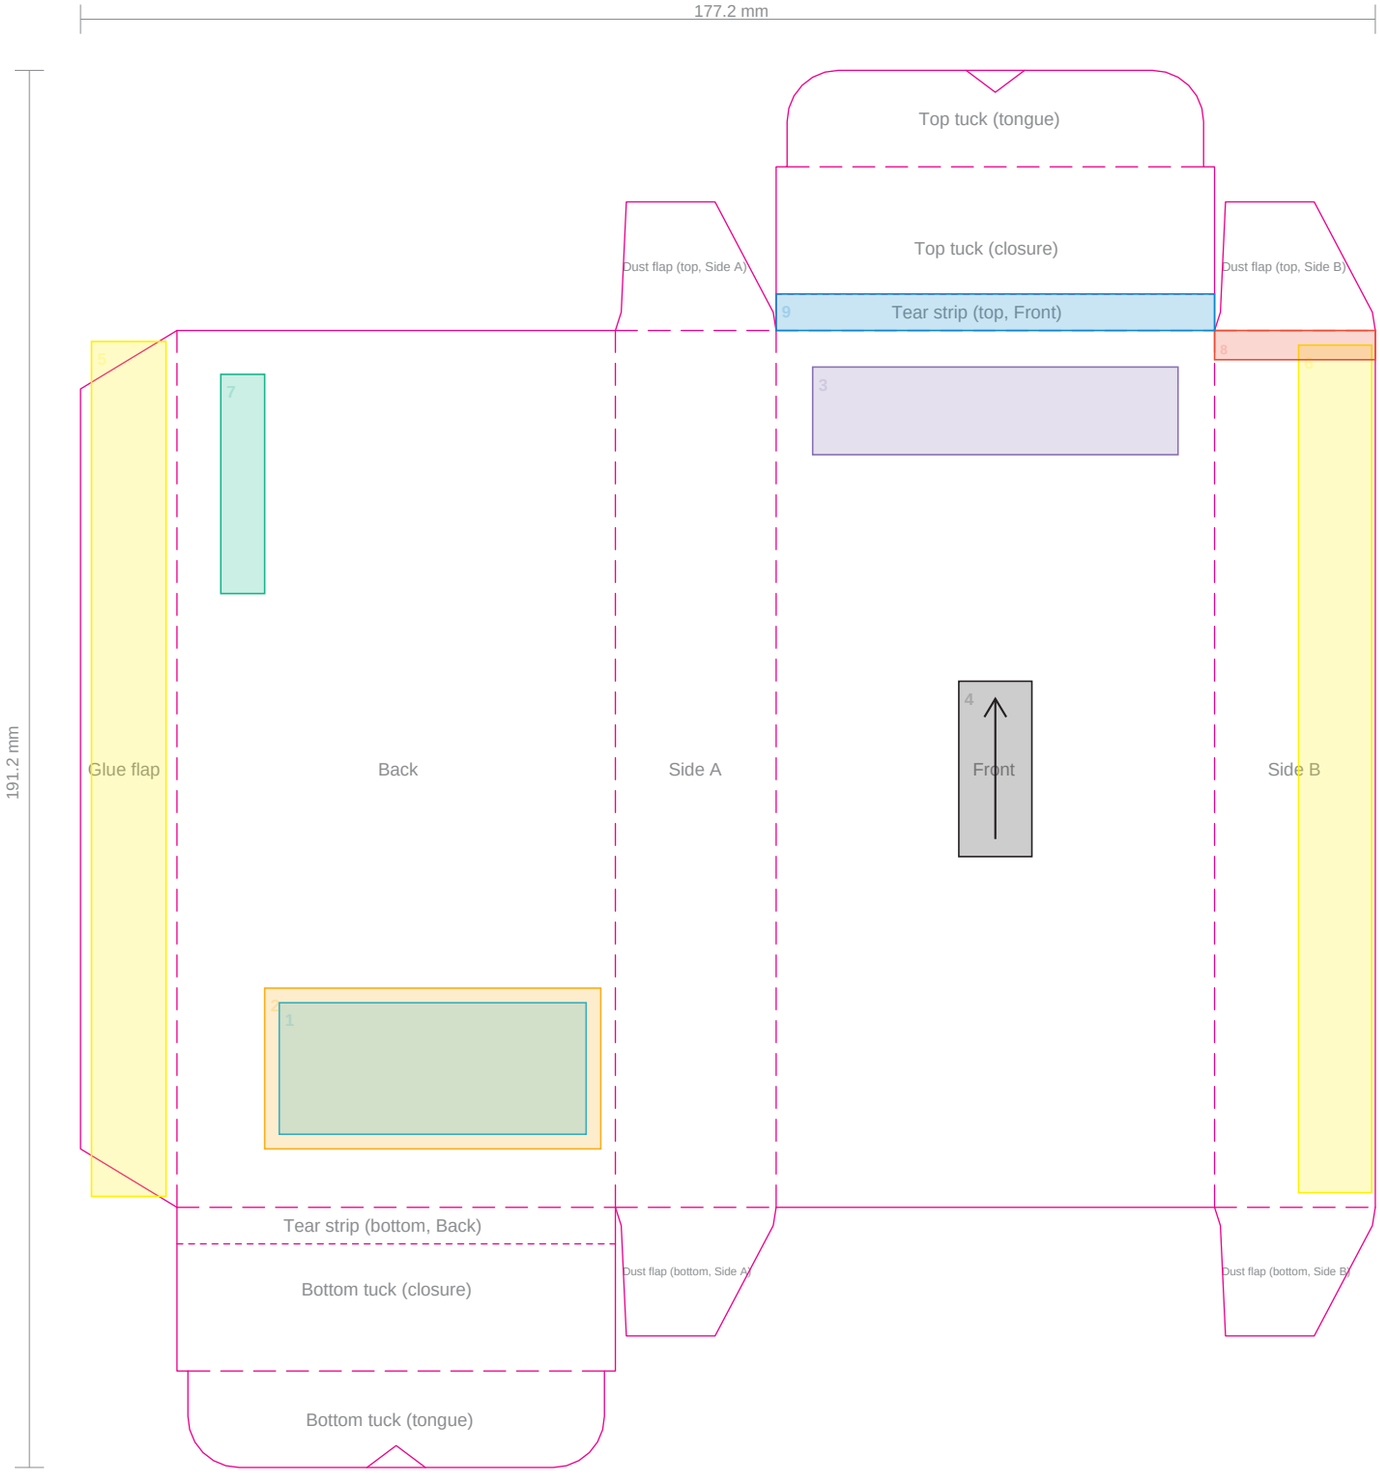


packart.dev · Dieline catalogue

Blister carton with tamper-evident tear strip

PA-CT-007 · Folding carton
Style: ECMA A20.20.03.01 + tamper-evident closure
Die extent: 177.2 × 191.2 mm (TrimBox)
Market: EU

Separations: Dieline (cut solid, crease 3/1.5 mm, perf 0.8/0.8 mm), Kiss cut, Technical, TP … — all non-printing, overprint.

Technical profile: EU FMD · inkjet coding

EU FMD (Reg. 2016/161): UI + ATD, online TIJ

1 UI: GS1 DataMatrix + HRI [Serialisation (2D + HRI)]
42 × 18 mm at 27.2 / 127.6 · Content: GTIN (01) · SN (21) · LOT (10) · EXP (17) · Method: Thermal inkjet, 600 dpi · Module / x-dim (mm): 0.40 · Quiet zone (mm): 1
Code min. 10 × 10 mm. HRI next to the code in the order GTIN/PC, SN, LOT, EXP.

2 Unvarnished coding window [Varnish-free area]
46 × 22 mm at 25.2 / 125.6 · Method: Knock out varnish and primer
Window 2 mm larger than the print area on all sides.

3 Braille: name + strength [Braille]
50 × 12 mm at 100.2 / 40.6 · Content: Product name and strength · Method: Marburg Medium, blind emboss
Keep 6 mm from creases and 3 mm from the coding window.

4 Reading direction: top closure up [Reading direction]
10 × 24 mm at 120.2 / 83.6 · Direction: up
Front text reads with the top tuck at the top.

5 Side seam glue [Glue area]
10.2 × 117 mm at 1.5 / 37.1 · Method: Cold glue, 2 lines
No ink, no varnish on the glue flap.

6 Glue contact (inside of Side B) [Glue area]
10 × 116 mm at 166.7 / 37.6
Matching unvarnished strip on the inside of the joint (reverse side).

7 Pharmacode (Laetus) [Barcode / Pharmacode]
6 × 30 mm at 19.2 / 41.6 · Content: Pharmacode, component ID · Module / x-dim (mm): 0.5 / 1.5 · Direction: up
Bars perpendicular to the machine direction; read on the folder-gluer.

8 Strength colour band [Visual edge mark / colour code]
22 × 4 mm at 155.2 / 35.6 · Colour: Pantone per strength
Band bleeds over the top crease so it is visible on the closed carton.

9 ATD: tear strip (top) [Tamper evidence (ATD)]
60 × 5 mm at 95.2 / 30.6 · Method: Perforation 1/1 mm
Keep text 2 mm away from the perforation.

Sample: parametric reconstruction of a standard style. Not a supplier die — not for production.
Generated 2026-11-08 20:43 UTC